


JIG Recovery Operating Steps:

When user fails to update the Unismart JIG, please operate the following steps to recover the data and update the JIG again.




Step 1:
Go back to the main menu, and then select "Help".

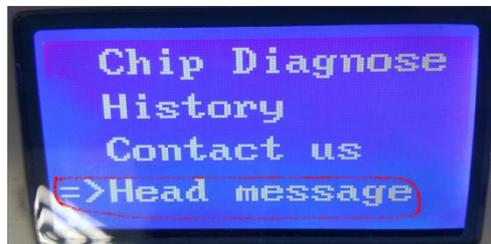

Step 2:
Go to the next menu and select "Head message".



Step 3:
Press button F1 or F2 to select "JIG Z".

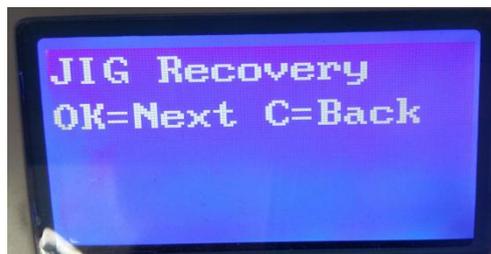

Step 4:
Press the Enter button to the JIG Recovery page.



Step 5:
Connect the fixture or the connecting line to the Unismart device, and then press the Enter button to recover the JIG data.

Note: the operation procedure above is for JIG : Z but it can also be applied to JIG ST1/H02/H03/H04/H06/H07/H08.