

Uni Epson II OEM Chip Reset Operating Instruction V1.0


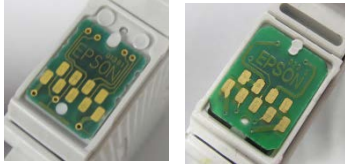



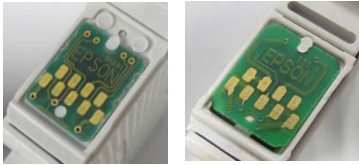



Contents

1. Feature	2
2. JIG List	2
3. Operating Procedure	3
4. Notice	4
5. The Way to Tell Epson II Encrypted/Non-encrypted Chips and Encrypted/Non-encrypted Cartridge	4
6. Code Alerts and Meanings	5

1. Feature

Automatically identify models, reset to the exact model without changing the color, yield, and region.

2. JIG List

JIG	Chip Photo	Apply to
		F type series and 731 series
		Epson III
		Epson IV
		F type series and 731 series
		73N series
		Epson III
		Epson IV

3. Operating Procedure

OEM Reset & OEM Check & OEM SCAN

Make sure that the JIG is correctly aligned with the chip contacts.



Figure 1



Click  in the main interface to scan chips.



Figure 2


After the chip is successfully scanned, you can enter into the final operation interface. Click to switch functions "RESET" "CHECK" "SCAN" and press the "Confirm" button on the JIG or Unismart device to carry out the chip operation.

	Brand	EPSON	Series	RST-OEM
	Product	EPSON-2	PCB	RST-EPSON2
		731N	Type	Inkjet
	Color	BK	JIG	EP5
	Region		yield	
	Apex credits		OEMcredits	1
	Chip type	OEM Chip	Data type	
Chip status	Chip already ok/new	Ink/toner	100%	
<div style="border: 2px solid red; padding: 5px; display: inline-block;">Operation succeeded</div>				<div style="border: 2px solid red; padding: 5px; display: inline-block; background-color: #90EE90;">RESET</div>

CHECK
RESET
SCAN

Figure 3

Note:

- ◆ Using  button to scan and check the chip information can only be realized in the main interface and final interface.
- ◆ The operation procedure above is for EPSON-2 series and it can also be applied to other PCB boards.


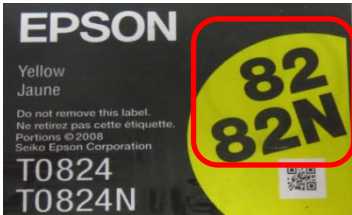

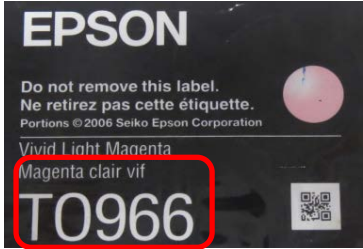

4. Notice

Epson II replacement chip can be divided into encrypted chip and non-encrypted chip

- ◆ The 73N series encrypted chips (model code has "N") have OEM information after resetting.
- ◆ Two types of non-encrypted chips:

- ① F type chips have non-OEM information after resetting
- ② 731 series chips have OEM information after resetting

5. The Way to Tell Epson II Encrypted/Non-encrypted Chips and Encrypted/Non- encrypted Cartridge

Subject	Chip Photo	Apply to	For Use in Cartridge
Encrypted chip		73N	
Non-encrypted chip		731	
		F type series	

6. Code Alerts and Meanings

Coding Hinting	Meaning	Analysis
Chip Already OK	Chip Already OK	/
Operation failed	Operation failed	①The chip is damaged. ②The JIG's probe does not align the contactors on the chip. ③The JIG is placed in the opposite direction.
Operation succeeded	Operation succeeded	/
Chip not match	Chip doesn't match	The chip that needs to be reset cannot select the current model.
Data not match	Data not match	①The chip is installed and its data is rewritten by the printer. ②The detected chip model doesn't match with the selected model on the Unismart device.
Chip is locked	Chip is locked	/
Chip's useful life is over	Chip's useful life is over	/
Brand new chip	Brand new chip	/
No chip detected	No chip detected	/
Wrong JIG ID	Wrong JIG ID	/
Not found JIG	Not found JIG	/

"Apex" herein refers to Apex Microelectronics Co., Ltd. The information contained herein is subject to change without prior notification. Apex shall not be liable for technical or editorial errors or omissions contained herein. Photographed products may not always match the description.